


/Group 2.6 Ordering Code Rules

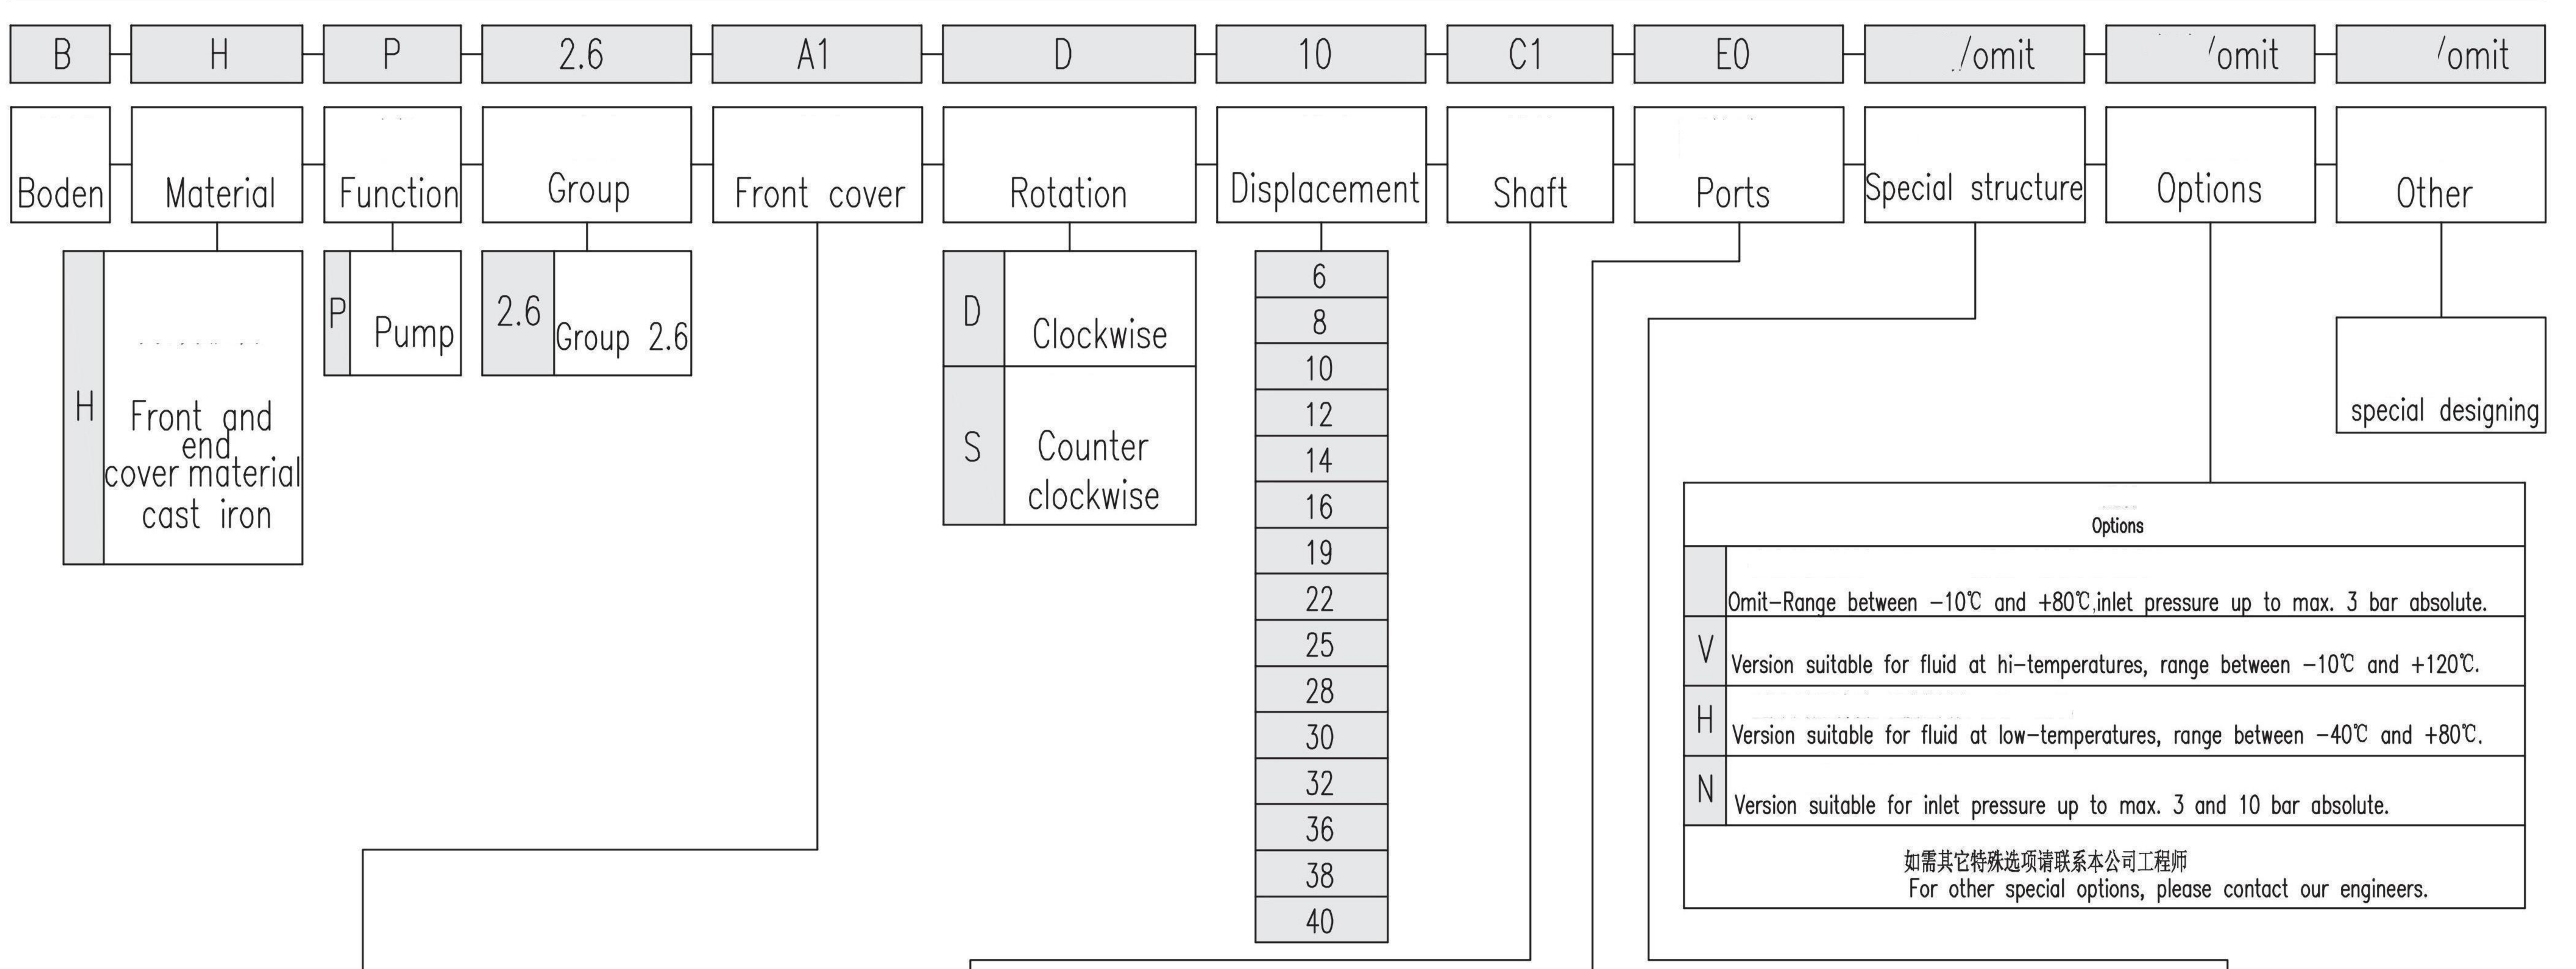

Front cover		Shaft		Ports		Special structure	
A1	<p>Diamond front cover (centering φ82.55mm)</p>	C1	straight keyed φ18	E	Rectangular flange	omit-regular	
A2	<p>Diamond front cover (centering φ101.6mm)</p>	C2	straight keyed φ19.05	F	Rectangular flange	Back cover with inlet and outlet	
		C6	straight keyed φ22.2	F	Split flange		
B0	<p>Square front cover (centering φ50.8mm)</p>	H1	Rectangle spline shaft └┘ 4-18x15x5	Z	Metric thread		
		H2	Rectangle spline shaft └┘ 6-20x16x4	L	Gas thread		
		S0	Involute spline shaft EXT12Z-1.5m-30°	U	UNF thread		
		S1	SAE spline shaft DP16/32-30°-10T	R	PT thread		
		S2	SAE spline shaft DP16/32-30°-11T	X	Body without ports		
		S3	SAE spline shaft DP16/32-30°-13T				
See page 163 for details		See page 164 for details		See page 165-166 for details		See page 166 for details	