


/Group 3 Ordering Code Rules

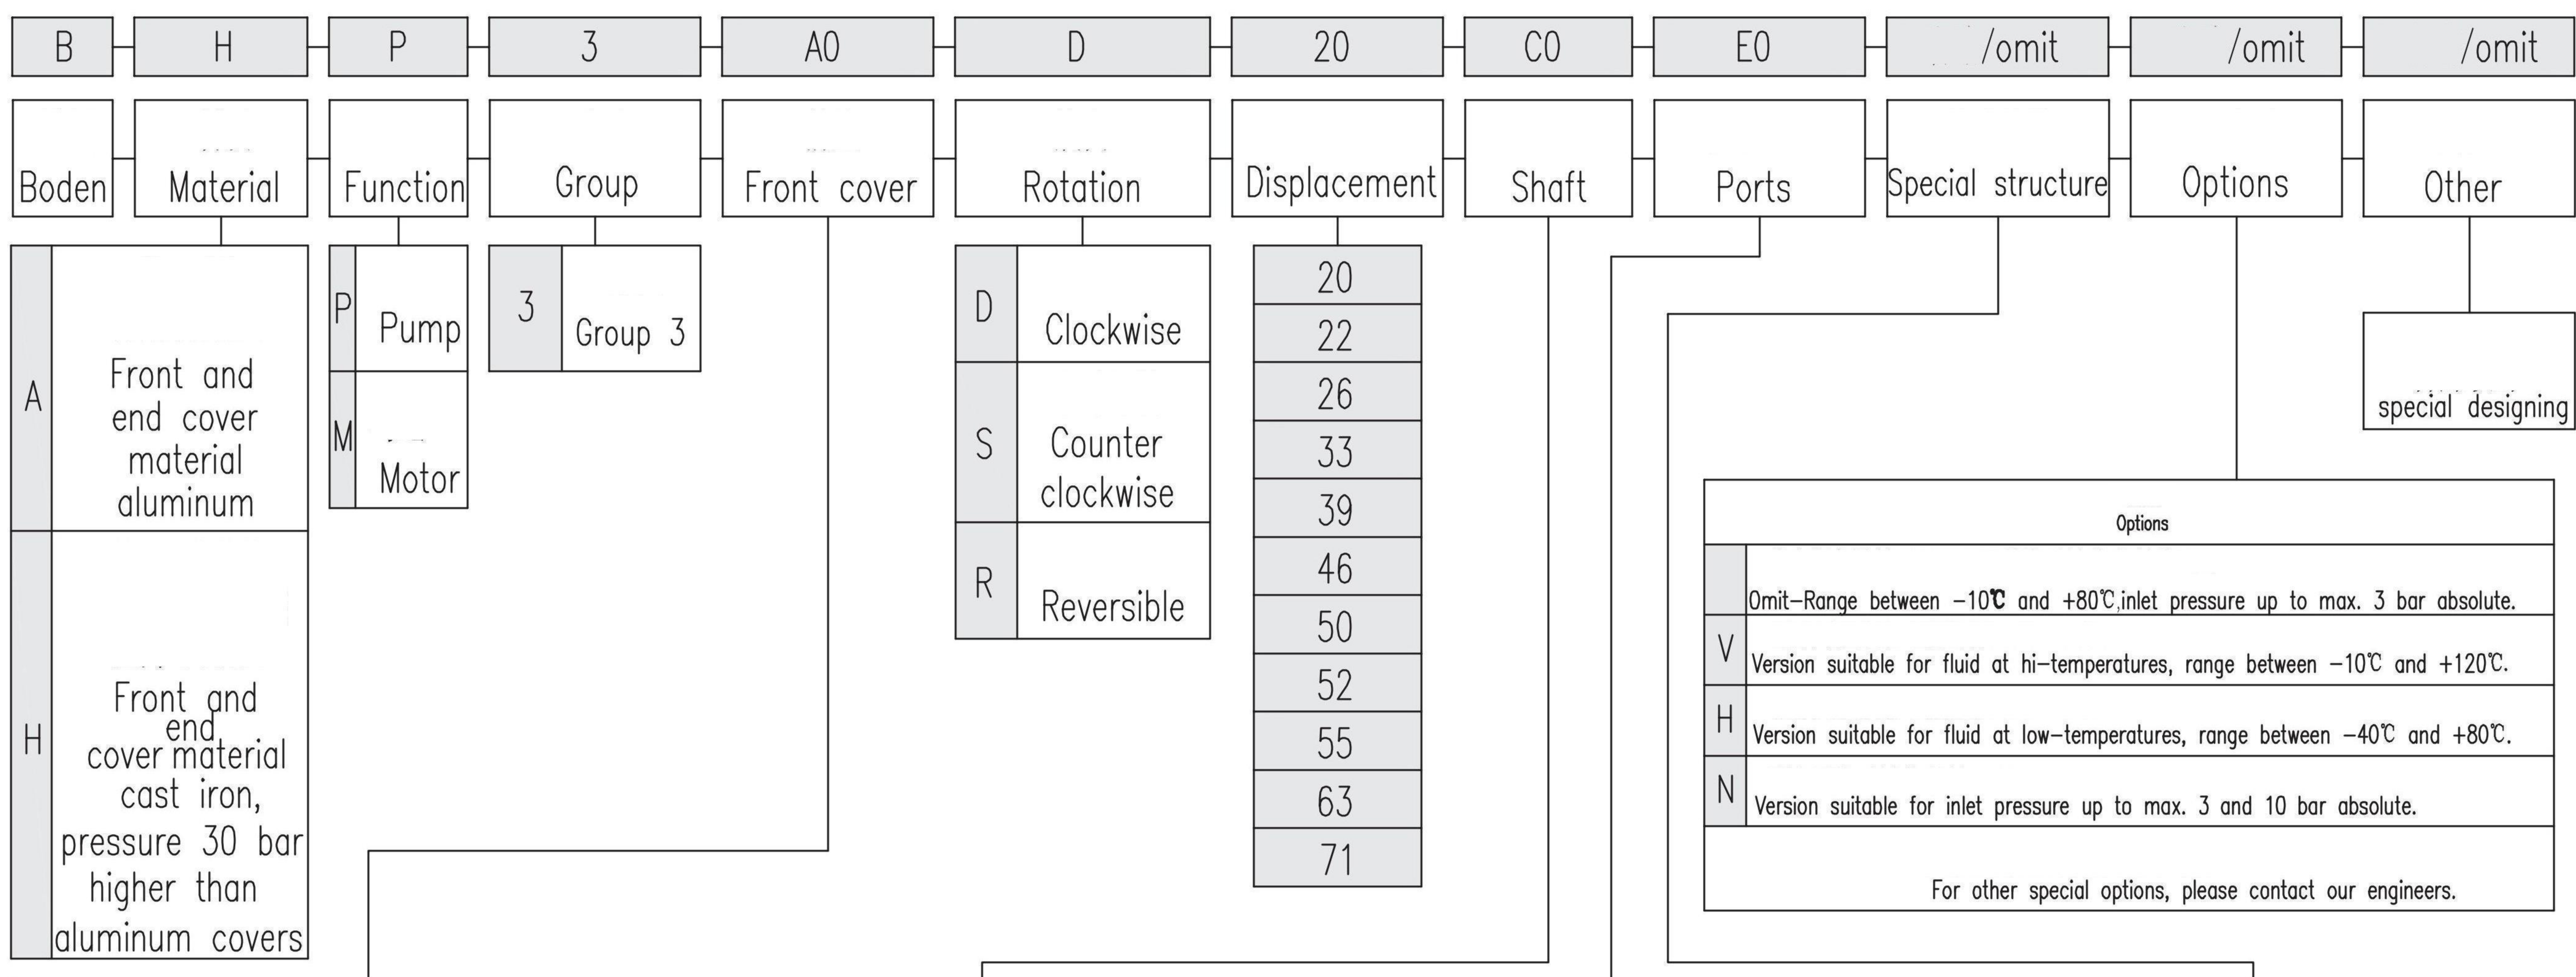

Front cover		Shaft		Ports		Special structure	
A0	Diamond front cover (centering $\phi 101.6\text{mm}$)	T0	Taper shaft 1:8	E	Rectangular flange		omit-regular
A1	Diamond front cover (centering $\phi 100\text{mm}$)	T1	Taper shaft 1:5	F	Rectangular flange		
B0	Square front cover (centering $\phi 90\text{mm}$)	C0	straight keyed $\phi 25$	F	Split flange	Q	Back cover with oil drain
B1	Square front cover (centering $\phi 50.8\text{mm}$)	C2	straight keyed $\phi 22.22$	Z	Metric thread		
B2	Square front cover (centering $\phi 105\text{mm}$)	C3	straight keyed $\phi 25.4$	L	Gas thread		
		H0	Rectangle spline shaft $\square 6-25 \times 20.1 \times 6$	U	UNF thread		
		H2	Rectangle spline shaft $\square 6-25 \times 21 \times 5$	R	PT thread		
		S0	SAE spline shaft DP16/32-30°-13T	X	Body without ports		
		S1	SAE spline shaft DP16/32-30°-15T				