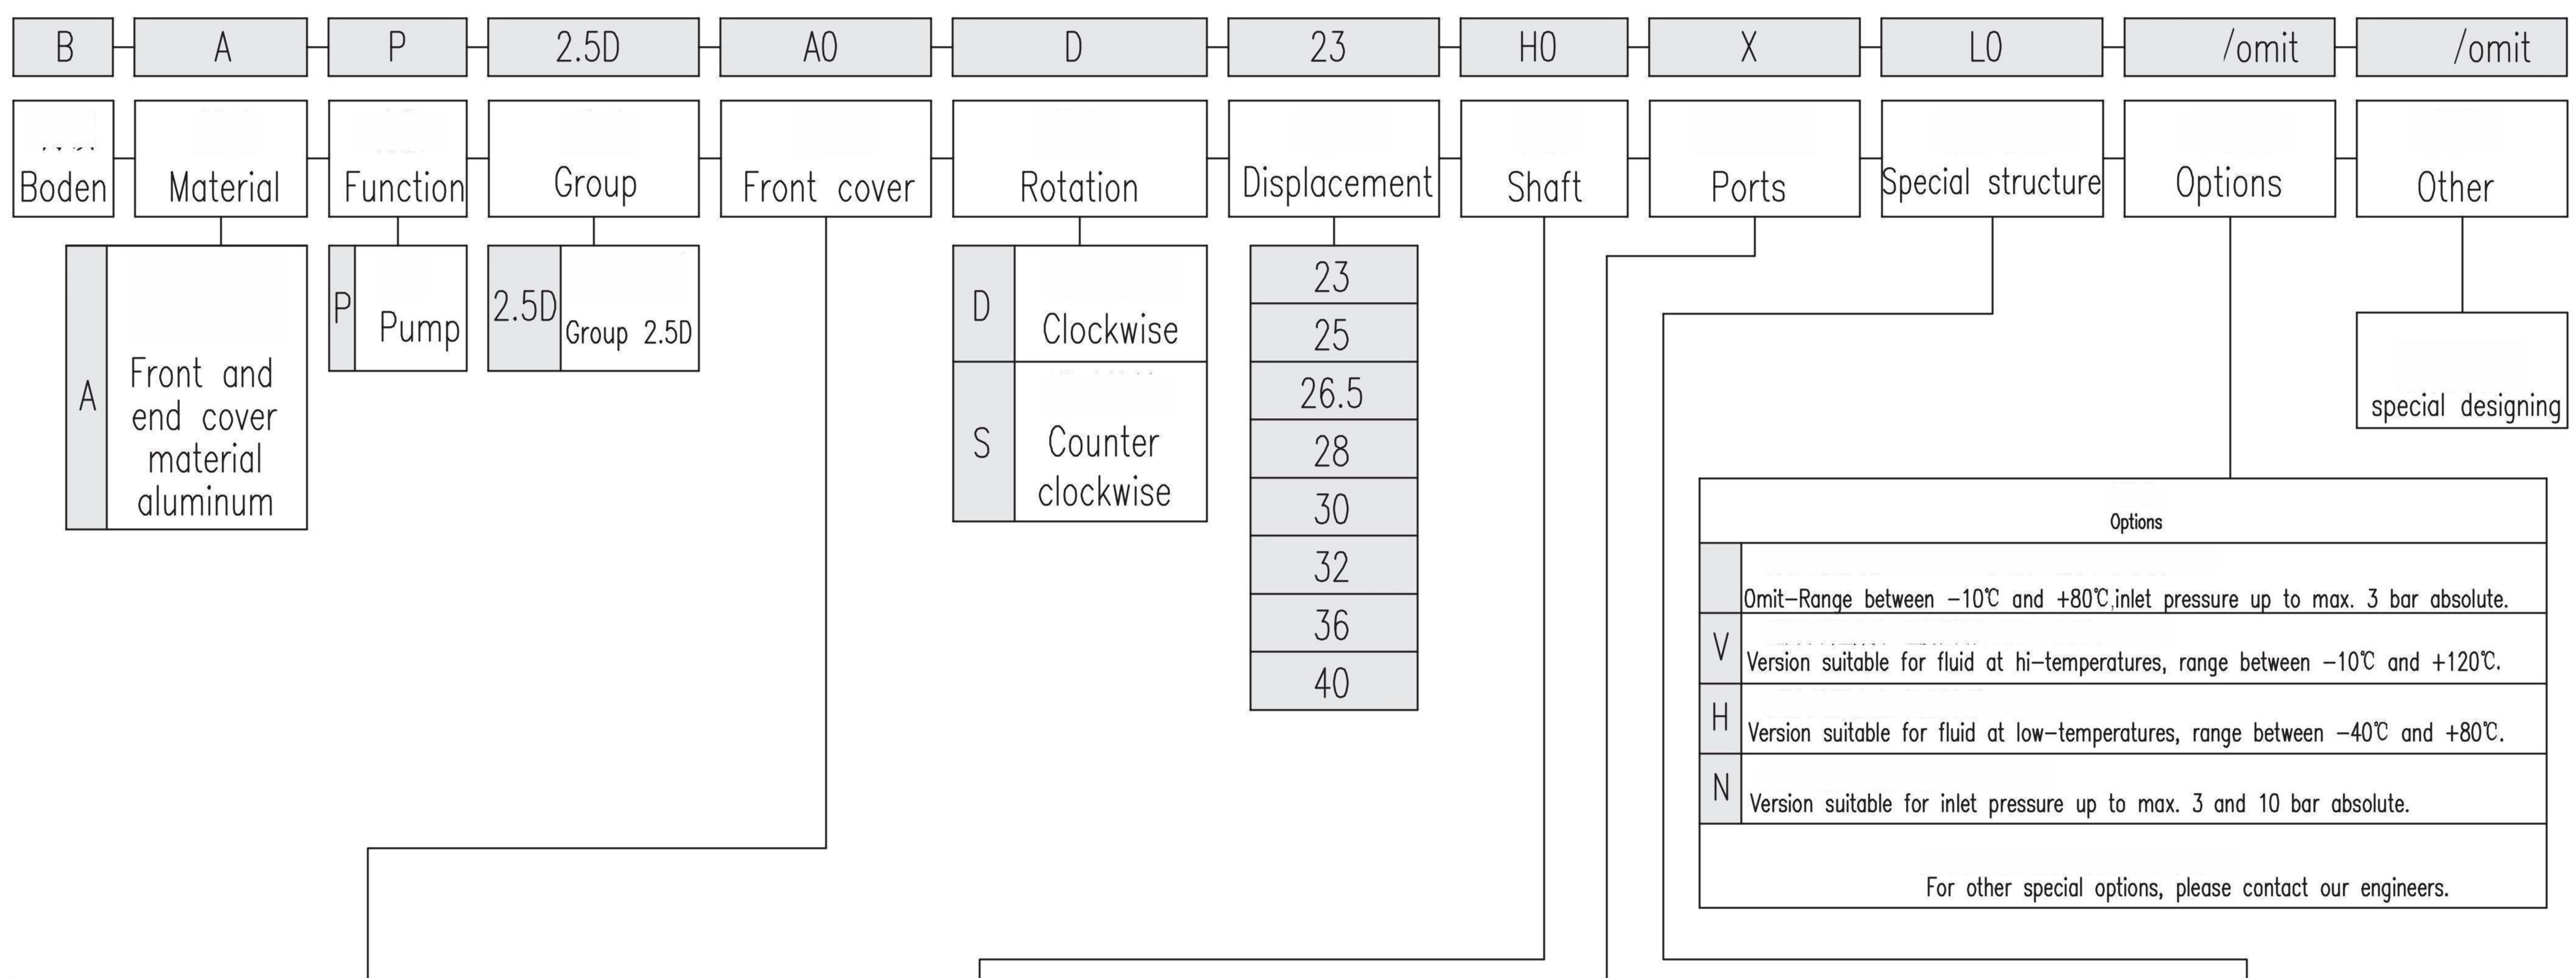
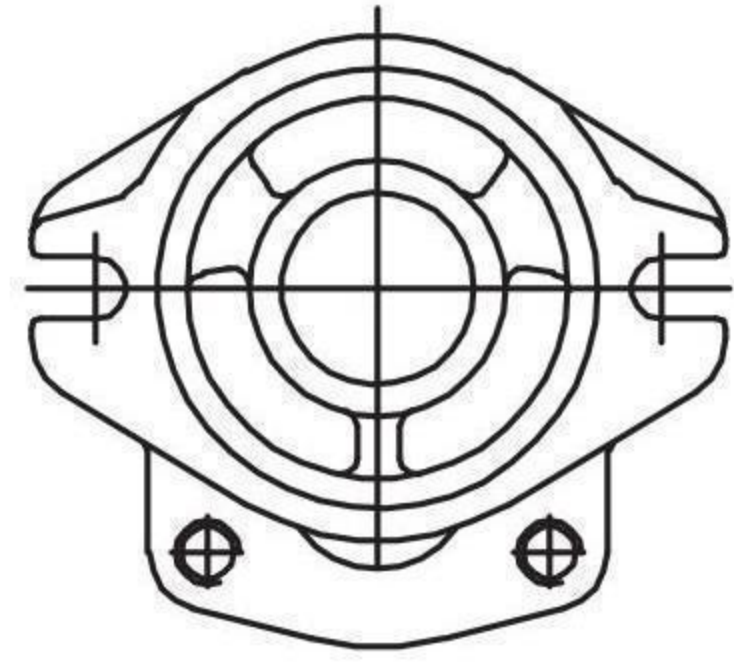
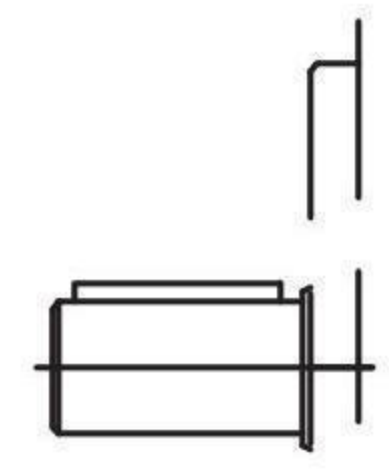
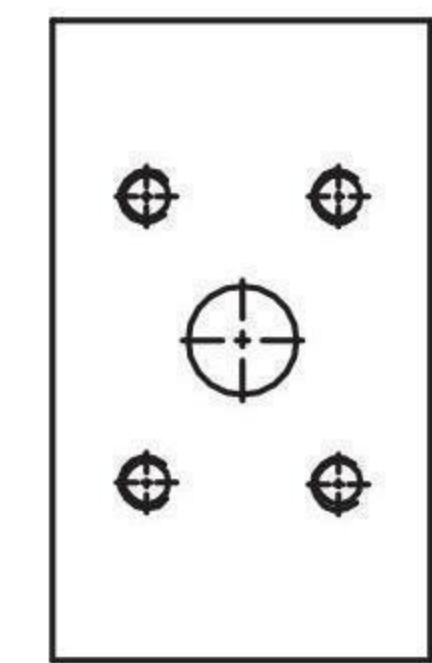
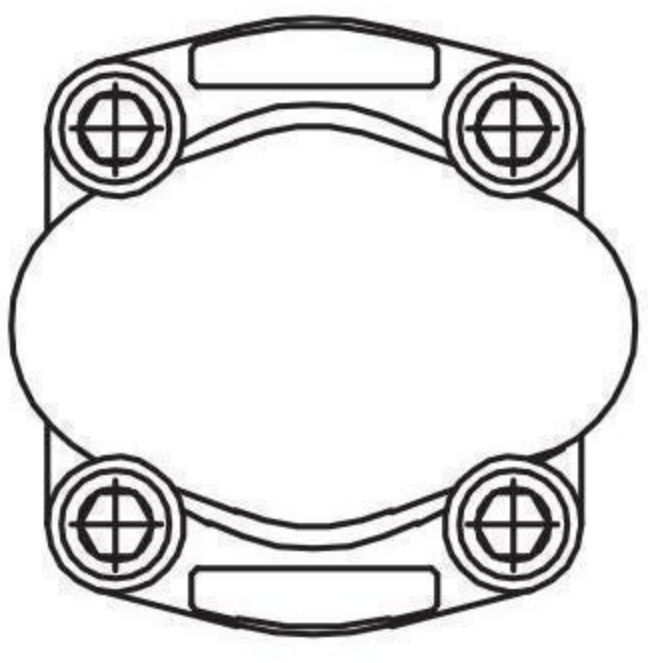
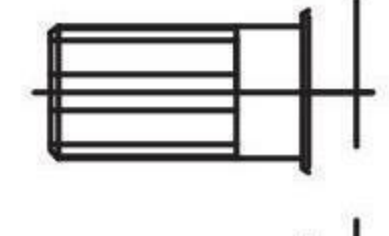

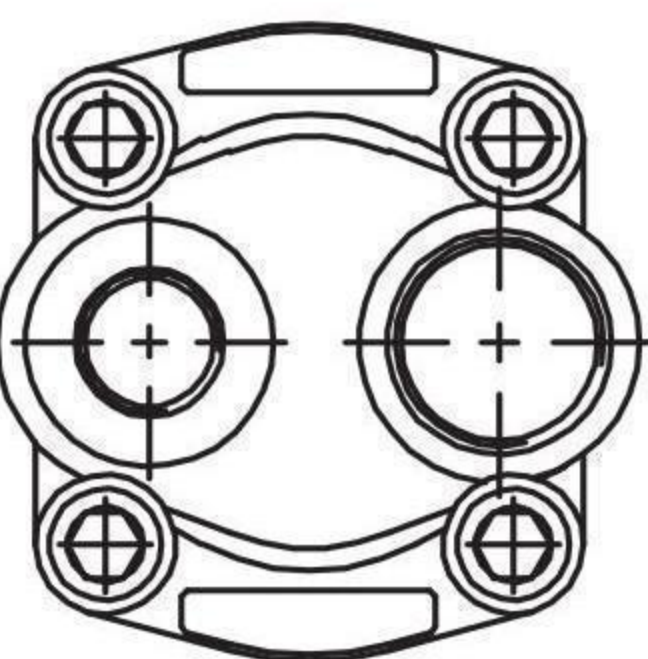
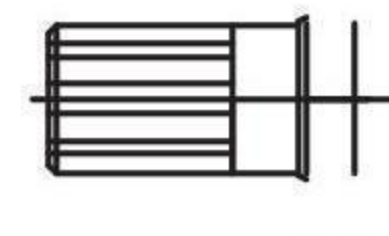
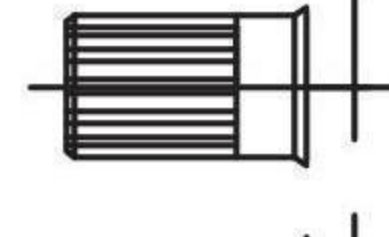




/Group 2.5D Ordering Code Rules



Front cover		Shaft		Ports		Special structure	
A0	Diamond front cover (centering $\phi 82.55\text{mm}$) 	C0	straight keyed $\phi 18$ 	F_	Split flange 		omit-regular 
		H0	Rectangle splineshaft $\square 4-18 \times 15 \times 5$ 	X	Body without ports 	L0	Back cover with oil inlet and outlet 
		H1	Rectangle splineshaft $\square 6-20 \times 16 \times 4$ 				
		S0	Involute spline shaft EXT12Z-1.5m-30° 				
		S1	SAE spline shaft DP16/32-30°-10T 				
		S2	SAE spline shaft DP16/32-30°-11T 				
		S3	SAE spline shaft DP16/32-30°-13T 